
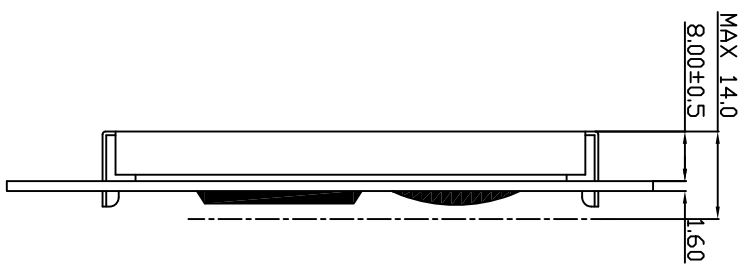


REV	DATE	DESCRIPTION	DESIGNED	CHECK	APPROVED

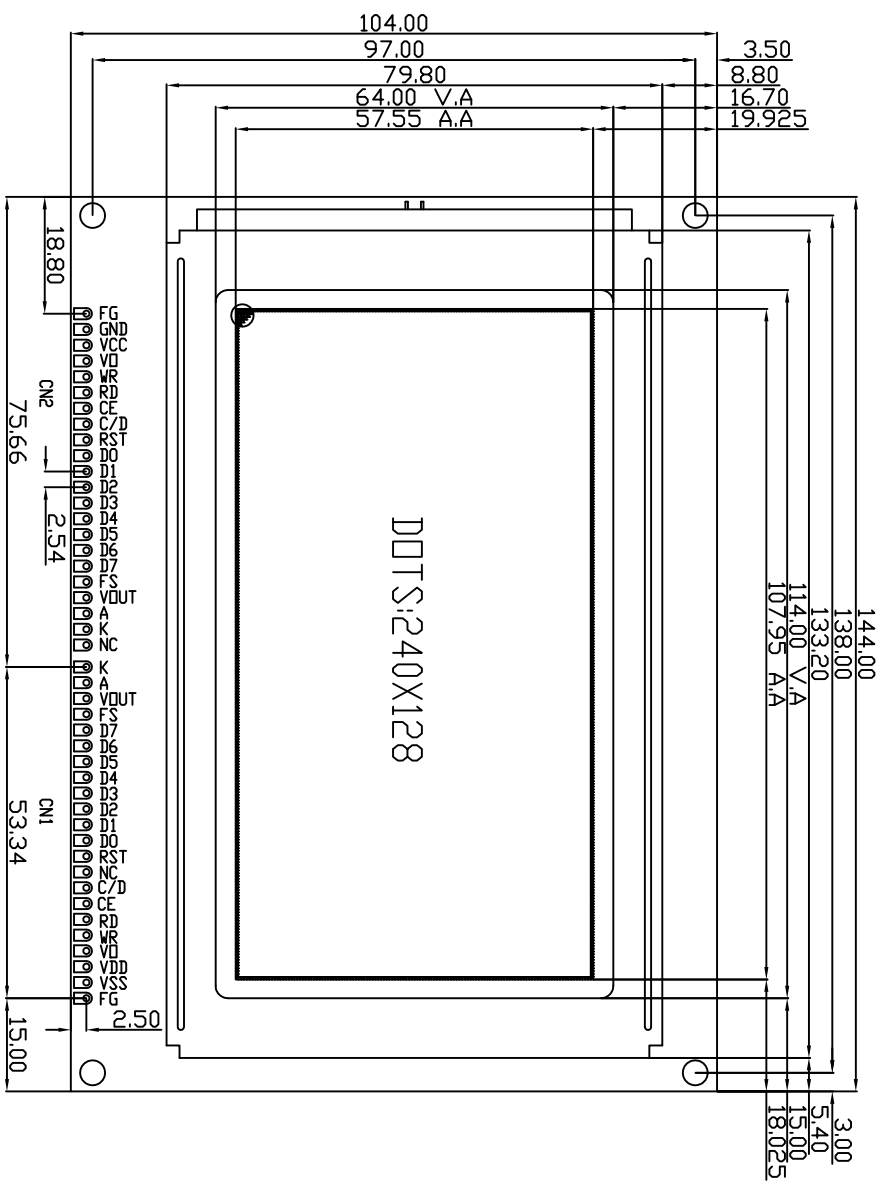

No.	PIN
1	FG
2	VSS
3	VDD
4	V0
5	WR
6	RD
7	/CE
8	C/D
9	NC
10	RST
11	DB0
12	DB1
13	DB2
14	DB3
15	DB4
16	DB5
17	DB6
18	DB7
19	FS
20	VOUT
21	A
22	K

NOTE:

1. DISPLAY MODE:STN-Y/G, POSITIVE/TRANSFLECTIVE
2. VIEWING DIRECTION: 6:00
3. OPERATION TEMP:-20° C - +70° C
4. STORAGE TEMP:-30° C - +80° C
5. DRIVE METHOD:1/128DUTY, 1/12BIAS
6. CONTROLLER:RA6963 BUILT IN SRAM AND DC-DC
7. VDD=5.0V, ILED=90mA (@VLED=5.0V) , COLOR: WHITE